



Indoor Car Cover

**NSX**

## Introduction

---

**Thank you for purchasing this genuine accessory.**

**Please read this Manual carefully before using the indoor car cover and keep it in the glove box for future reference.**


This product is designed to be used exclusively on your NSX. We are not responsible if the product is used for anything other than its intended purpose.

This Manual should be considered a permanent part of the vehicle. It should remain with the vehicle at all times and stay with the vehicle when sold.

As you read this manual, you may find information that is preceded by a **NOTICE** symbol. This information is intended to help you avoid damage to your vehicle, other property, or the environment.

### NOTICE

- If you wish to disable the auto pop up door handles when installing the car cover, turn the auto pop up switch to OFF in the glove box.

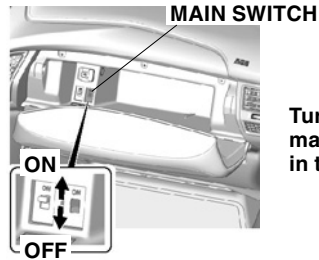

Turn the auto pop up main switch to OFF in the glove box.


QED10010T

When installing your cover, make sure the mirror pockets on the sides of the cover are pulled over the mirrors before pulling the corners over the bumpers as shown in figure A.

### NOTICE

- Once the vehicle has been turned off, allow the vehicle to cool for at least 20 minutes before installing your cover.

FIGURE A

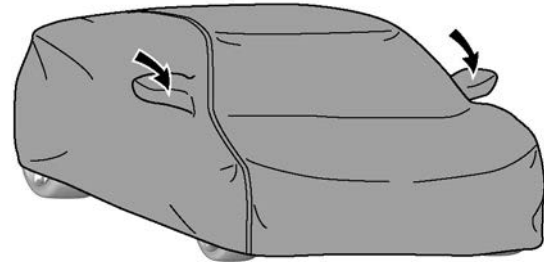

QF242010T

## Removal


---

First, release the four corners from under the bumpers. Then fold the cover from the left side of the vehicle to the middle of the vehicle. Make the fold about 2 feet wide as shown in figure B. Make the same fold from the other side of the vehicle to meet the first folded section. Then, roll the cover from the front to back as shown in figure C.

### NOTICE


Carefully remove the mirror pockets from the side mirrors. Do not pull or tug on them as this may tear the cover or damage the mirrors.

FIGURE B

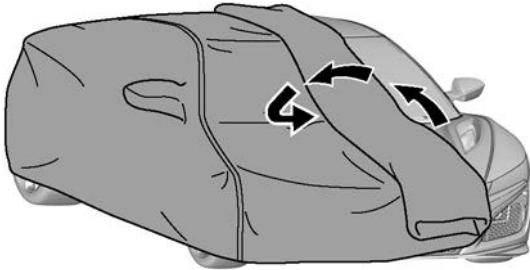


QF242020T

FIGURE C

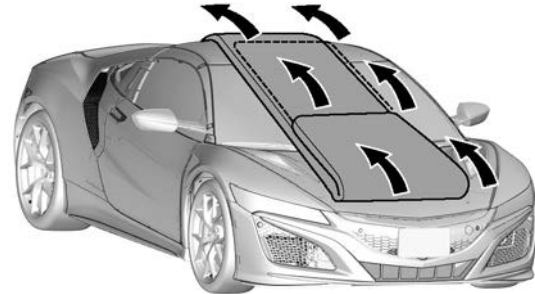

QF242030T

Place the folded cover in the storage bag and store it in the trunk.

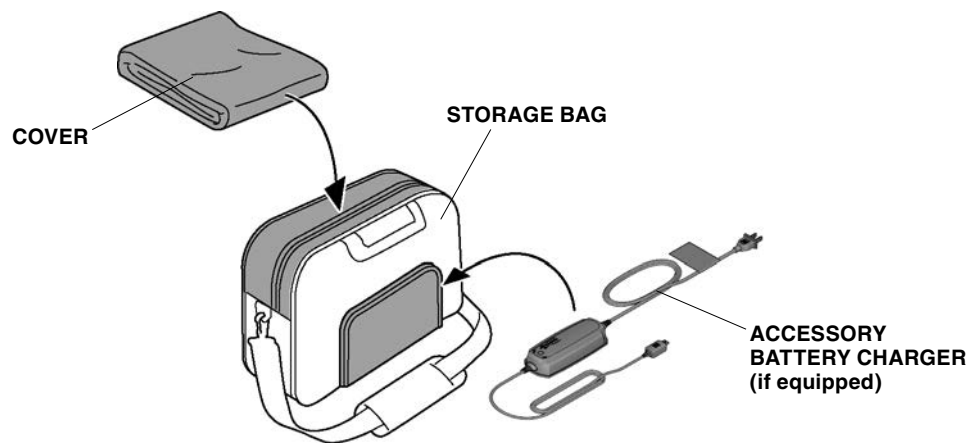

QED10020T

## Use and Care

---

### NOTICE

- Do not machine wash.
- If the cover becomes soiled, spot clean it with an all-purpose cleaner and rinse with water.
- Do not machine dry ; air dry only.
- Do not install the cover on a recently painted vehicle. Check with your body shop for the recommended curing time. Premature use of a cover in this situation could result in damage to painted surfaces.
- Do not install the cover on a wet vehicle, especially when the temperature is below freezing.
- Do not use this cover when your vehicle is being towed.
- Do not expose the vehicle to high winds when the cover is installed.



**ACURA**